





6.3” 不锈钢膜壳-3A卫生型

6.3” Membrane Housing- For Sanitary Water Use With -3A Standard

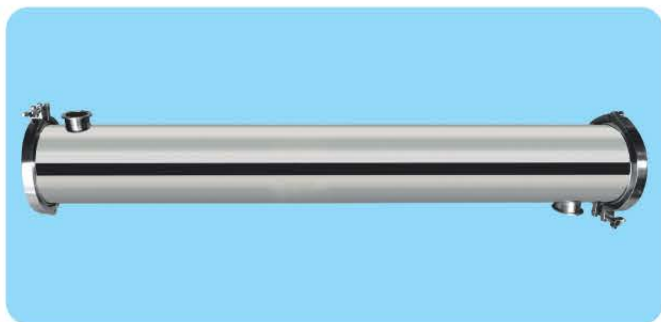

参数概述/General Specifications

侧进水，不锈钢卫生型卡箍锁紧	Side port, Stainless Steel Tri-clamp closure
最大工作压力：300PSI	Max working pressure: 300PSI
最大工作温度：90℃	Max working temperature: 90℃
壳体材质：不锈钢304/316L	Housing Material: SS304/316L
端盖材质：不锈钢304/316L	End cap material: SS304/316L
O型圈材质：EPDM，NSF级别	O-ring material: EPDM, with NSF certificate
表面处理：	Finish:
机械抛光（320目，Ra<0.6）	Mechanical polishing (320 mesh, Ra<0.6)
连接形式	Connect type
--进/出水口：卫生级接口	--F/C port: Tri-clamp ferrule
--透过水口：卫生级接口	-- Permeate port: Tri-clamp ferrule
型号：配6338标准膜，可装1~6支	Model: for 6338 element, of 1~6 pcs

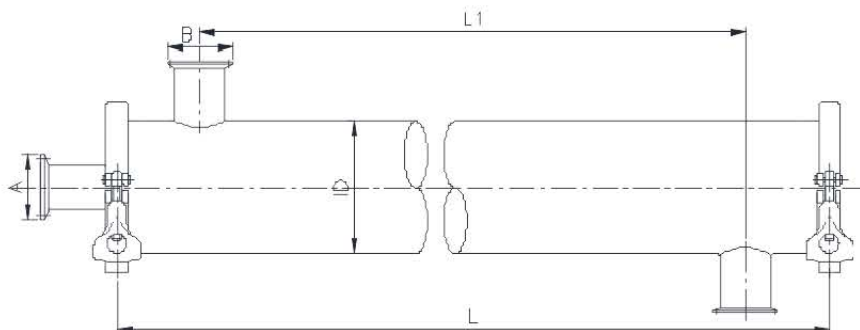

尺寸/Dimension

型号/Model	L(mm)	L1(mm)	ID(mm)	A(inch)	B(inch)
JD3A-6338-1	1288	1118	Φ162	1.5~3"	1"
JD3A-6338-2	2304	2134	Φ162	1.5~3"	1"
JD3A-6338-3	3320	3150	Φ162	1.5~3"	1"
JD3A-6338-4	4336	4166	Φ162	1.5~3"	1"
JD3A-6338-5	5352	5182	Φ162	1.5~3"	1"
JD3A-6338-6	6368	6198	Φ162	1.5~3"	1"