



2.5" 不锈钢膜壳—工业型

2.5" Membrane Housing- For Industry Use

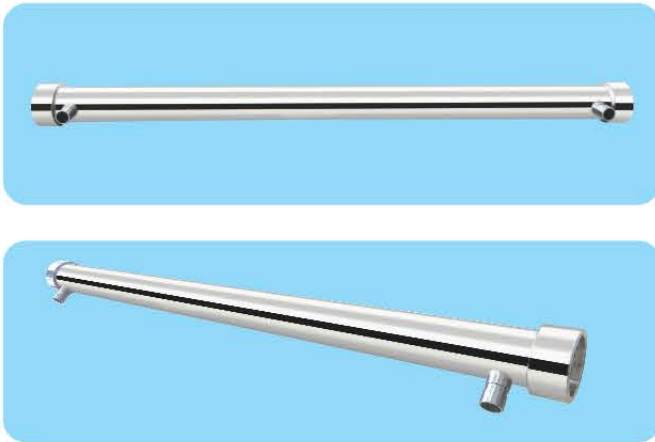

参数概述/General Specifications

侧进水	Side port
最大工作压力：1000PSI	Max working pressure: 1000PSI
最大工作温度：90℃	Max working temperature: 90 °C
壳体材质：不锈钢304/316L	Housing Material: SS304/316L
端盖材质：不锈钢304/316L	End cap material: SS304/316L
O型圈材质：EPDM，NSF级别	O-ring material: EPDM, with NSF certificate
表面处理：机械抛光（320目，Ra<0.6）	Finish: Mechanical polishing (320 mesh, Ra<0.6)
连接形式：	Connect type
--进/出水口：卫生级接口	--F/C port: Tri-clamp ferrule
--透过水口：卫生级接口	--Permeate port: Tri-clamp ferrule
型号：配2540标准膜，可装1~2支	Model: for 2540 element, of 1~2 pcs

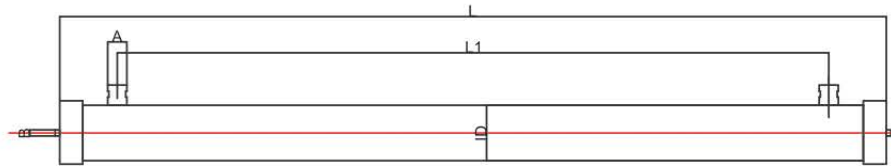

尺寸/Dimension

型号/Model	L(mm)	L1(mm)	ID(mm)	A(inch)	B(inch)
JD-2540-1	1202	1060	Φ 63.5	1/2"	1/2"
JD-2540-2	2218	2076	Φ 63.5	1/2"	1/2"